

KUNKLE

ASME Section VIII, Gas, "UV" National Board Certified.
PED certified for non-hazardous gas.

Features

- Lightweight aluminum construction. Resistant to environmental and internal corrosion.
- Model 230 (non-code) is direct spring-loaded design with synthetic disc insert.
- Model 330 series incorporates a differential mechanism which maintains a predetermined seat-contact load.
- The full spring load is never imparted to synthetic disc insert (models 330, 330S, and 333S only).
- Seat tightness increases to a maximum as inlet pressure approaches the opening pressure.
- Each Kunkle valve is tested and inspected for pressure setting and leakage.

Model Descriptions

Model 230: 1/4" Male NPT - 300/1500 psig.

Model 330: 1/4" Male NPT - 1000/5500 psig. Aluminum housing, SS trim (seat and disc with synthetic insert). Sidewall discharge.

Model 330S: Same as model 330 except SS body suitable for 1000/6500 psig.

Model 333S: Same as model 330S except 1/2" Female NPT side outlet. Pressure-tight cap.

Applications

- Multi-stage high pressure compressors, intercoolers and aftercoolers.
- High pressure receivers and storage bottles.
- Thermal expansion relief.



Model 330



Pressure and Temperature Limits

Model 230:

300 to 1500 psig [20.6 to 103.4 barg]
-20° to 185°F [28.9° to 85°C]

Model 330:

1000 to 5500 psig [68.9 to 379.2 barg]
-20° to 185°F [28.9° to 85°C]

Model 330S:

1000 to 6500 psig [68.9 to 448.1 barg]
-20° to 185°F [28.9° to 85°C]

Model 333S:

1000 to 6500 psig [68.9 to 448.1 barg]
-20° to 185°F [28.9° to 85°C]

Maximum back pressure 100 psig¹.

Note

1. Back pressure reduces set pressure on a one to one basis and reduces capacity. Back pressure in excess of 10% of set pressure is not recommended.

Parts and Materials

Model 230


No.	Part Name	Materials
1	Nozzle	SS SA479-304
2	O-ring	Teflon®
3	Bottom Disc	SS A582-303
4	Insert	Kynar®
5	Seal	Teflon®
6	Top Disc	SS A582-303
7	Spring Step	Aluminum B211 Alloy 2024 T351
8	Spring	Steel A231, Aluminum Coated
9	Cap	Aluminum B211 Alloy 2024 T351
10	Top Spring Plate	Aluminum B211 Alloy 2024 T351
11	Compression Screw	Aluminum B211 Alloy 2024 T351
12	Hood	Aluminum B211 Alloy 2024 T351

Models 330 and 330S


No.	Part Name	Materials
1	Nozzle	SS SA479-304
2	O-ring	Teflon®
3	Body	Aluminum SB211 Alloy 2024 T351 ¹
4	Bottom Spring	SS A313-302
5	Bottom Disc	SS A582-303
6	Bottom Spring Step	Aluminum B211 Alloy 2024 T351
7	Insert	Kynar®
8	Seal	Teflon®
9	Top Disc	SS A582-303
10	Top Spring	Steel A231 Aluminum Coated
11	Cap	Aluminum SB-211 Alloy 6061-T6
12	Top Spring Step	Aluminum B211 Alloy 2024 T351
13	Compression Screw	SS A582-303
14	Jam Nut	SS 18-8

Note

1. Model 330S, SS SA479-304.

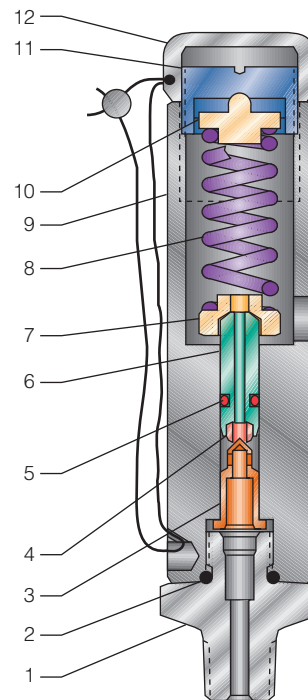


Model 230

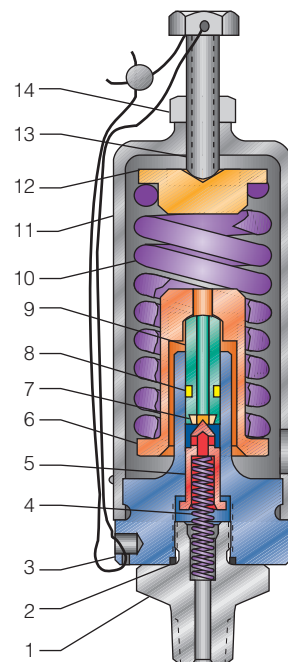

Models 330 and 330S

Parts and Materials

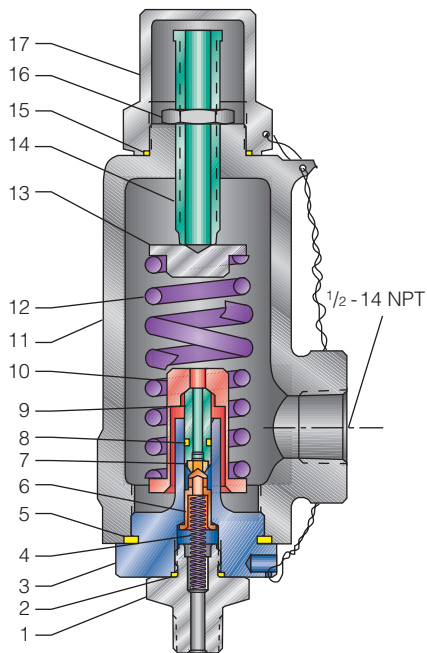

Model 333S


Model 333S

No.	Part Name	Material
1	Nozzle	SS SA479-304
2	O-ring	Teflon®
3	Body	SS SA479-304
4	Bottom Spring	SS A313-302
5	O-ring	BUNA-N
6	Bottom Disc	SS A582-303
7	Insert	Kynar®
8	Seal	Teflon®
9	Top Disc	SS A582-303
10	Spring Step - Bottom	Aluminum B211 Alloy 2024-T351
11	Bonnet	Aluminum SB26 Alloy 356-T6
12	Top Spring	Steel A231 Aluminum Coated
13	Spring Step - Top	Aluminum B211 Alloy 2024-T351
14	Compression Screw	SS A479-316
15	O-ring	BUNA-N
16	Jam Nut	SS A479-316
17	Cap	Aluminum B211 Alloy 2024-T351


Specifications

Size (Model 333S)		Dimensions, in			Weight (lb)
Inlet	Outlet	A	B	C	
1/4" and 1/2"	1/2" and 3/4"	27/8	17/8	7 ¹¹ / ₁₆	1


Dimensions are for reference only.

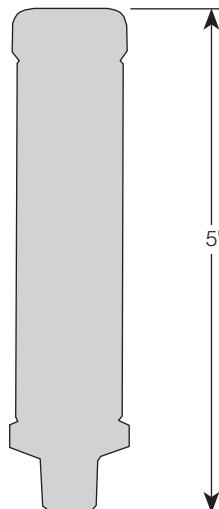

Model 230

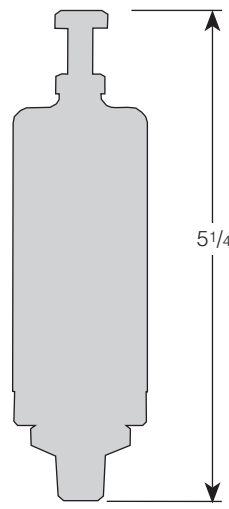

Models 330 and 330S

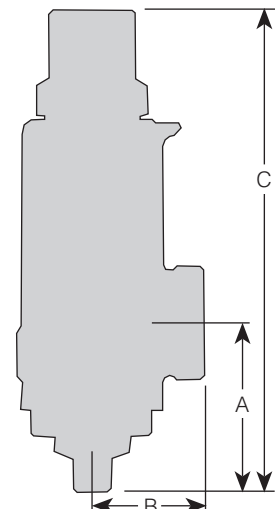

Model 333S

Kunkle Safety and Relief Products

Models 230, 330, 330S and 333S

Model Number/Order Guide

Model Number Position	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Example	0	2	3	0	—	A	0	1	—	N	C	1	4	0	0

Model

0230
0330
330S
333S

Inlet

A - 1/4" MNPT
C - 1/2" MNPT

Variation (01 to 99)

01 - Catalog standard
01 - 1/2" MNPT x 1/2" FNPT (333S only)
02 - 1/2" MNPT x 3/4" FNPT (333S only)

Design Revision

Indicates non-interchangeable revision
Dash (-) if original design

Valve Service

N - Non-code Air/Gas (Model 230 only)
K - Gas ASME Section VIII (Models 330, 330S, and 333S only)

Spring Material

C - Steel A231 with Coating (Polyester)

Set Pressure

Model 230 - 300 psig (0300) to 1500 psig (1500)
Model 330 - 1000 psig (1000) to 5500 psig (5500)
Models 330S and 333S - 1000 psig (1000) to 6500 psig (6500)

Model 230 Capacities

SCFM Air, 10% Accumulation

Set Pressure psig	Capacity (Non-code)
300	14
500	23
750	34
1000	45
1250	56
1500	67

Models 330, 330S, 333S Capacities

SCFM Air, 10% Accumulation

Set Pressure psig	Capacity
1000	29
1100	32
1200	35
1300	38
1400	40
1500	43
1750	50
2000	58
2250	65
2500	72
2750	79
3000	86
3500	100
4000	115
4500	129
5000	143
5500	158
6000	172
6500	186

KUNKLE

953 Old U.S. Highway 70
Black Mountain, North Carolina 28711-2549
Customer Service Phone: 1-828-669-3700

www.kunklevalve.com

Tyco Flow Control (TFC) provides the information herein in good faith but makes no representation as to its comprehensiveness or accuracy. This data sheet is intended only as a guide to TFC products and services. Individuals using this data sheet must exercise their independent judgment in evaluating product selection and determining product appropriateness for their particular purpose and system requirements. TFC MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT(S) TO WHICH THE INFORMATION REFERS. ACCORDINGLY, TFC WILL NOT BE RESPONSIBLE FOR DAMAGES (OF ANY KIND OR NATURE, INCLUDING INCIDENTAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES) RESULTING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION. Patents and Patents Pending in the U.S. and foreign countries. Tyco reserves the right to change product designs and specifications without notice. All registered trademarks are the property of their respective owners. Printed in the USA.