

KUNKLE

ASME Section VIII Air/Gas, “UV” National Board Certified, Safety Valves

Features

- Top guided disc provides optimum performance.
- Each Kunkle valve is tested and inspected for pressure setting and leakage.

Applications

- Small to medium size, multi-stage, air compressors, intercoolers, aftercoolers, instrument/control air lines and systems.
- Air tanks/receivers and pressurized equipment.

Pressure and Temperature Limits

60 to 4000 psig [4 to 276 barg]
-20° to 300°F [-29° to 150°C]



Kunkle Safety and Relief Product

Model 30


ASME Section VIII Air/Gas, "UV" National Board Certified, Safety Valves

ASME Section VIII Air Capacity 10% Accumulation; 60°F [16°C]

Set Pressure psig [barg]	Capacity SCFM [Nm³/h]
60 [4]	15 [23]
100 [6.9]	23 [37]
250 [17.2]	54 [87]
300 [20.7]	64 [103]
400 [27.6]	85 [136]
500 [34.5]	105 [169]
750 [51.7]	156 [251]
1000 [69.0]	207 [334]
1250 [86.2]	258 [416]
1500 [103.4]	310 [499]
1750 [121.0]	361 [580]
2000 [138.0]	412 [663]
2250 [155.0]	463 [745]
2500 [172.0]	514 [826]
3000 [207.0]	617 [993]
3500 [241.0]	719 [1155]
4000 [276.0]	821 [1320]


Parts and Materials

No.	Part Name	Material
1	Body	Brass
2	Guide	Brass
3	Spring	SS
4	Compression Screw	Brass
5	Lift Ring	SS
6	Ball	Torlon®

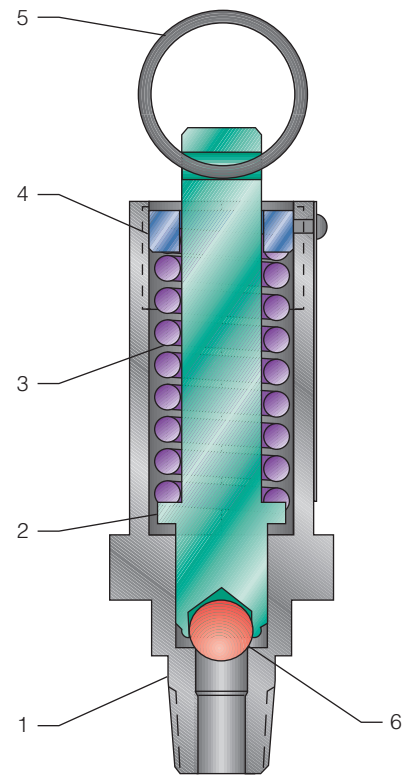

Model Number/Order Guide

Model Number Position	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Example	0	0	3	0	-	A	0	1	-	K	M	0	2	5	0
Model	0030														
Inlet Size	A - 1/4"														
Variation (01 to 99)	01 - Catalog standard NPT connection 60 - BSPT connection														
Design Revision	Indicates non-interchangeable revision. Dash (-) if original design.														
Spring Material	M - SST														
Set Pressure	0060 - 60 psig [4 barg] 4000 - 4000 psig [276 barg]														

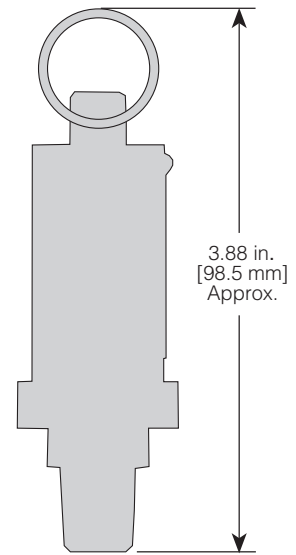

Model 30

KUNKLE

953 Old U.S. Highway 70
Black Mountain, North Carolina 28711-2549
Facility Phone: 1-828-669-3700

www.kunklevalve.com

Tyco Flow Control (TFC) provides the information herein in good faith but makes no representation as to its comprehensiveness or accuracy. This data sheet is intended only as a guide to TFC products and services. Individuals using this data sheet must exercise their independent judgment in evaluating product selection and determining product appropriateness for their particular purpose and system requirements. TFC MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT(S) TO WHICH THE INFORMATION REFERS. ACCORDINGLY, TFC WILL NOT BE RESPONSIBLE FOR DAMAGES (OF ANY KIND OR NATURE, INCLUDING INCIDENTAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES) RESULTING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION. Patents and Patents Pending in the U.S. and foreign countries. Tyco reserves the right to change product designs and specifications without notice. All registered trademarks are the property of their respective owners. Printed in the USA.